


# TECHNICAL DATA SHEET



## ICOM UD1200 0, 50 csm, 125 cm

PLY ORIENTATION	FIBRE	FIBRE TEX	PLY WEIGHT (g/m <sup>2</sup> )
0° Ply	E-Glass	2400	1134
90° Ply	E-Glass	300	59
CSM	E-Glass	2400	50

STITCH PATTERN	TRICOT	D TEX	PLY WEIGHT (g/m <sup>2</sup> )
STITCH THREAD	Texturised Polyester	78	5
STITCH GAUGE	6	-	-
STITCH LENGTH	4 mm	-	-
		TOTAL WEIGHT	1250 [+/- 5%]

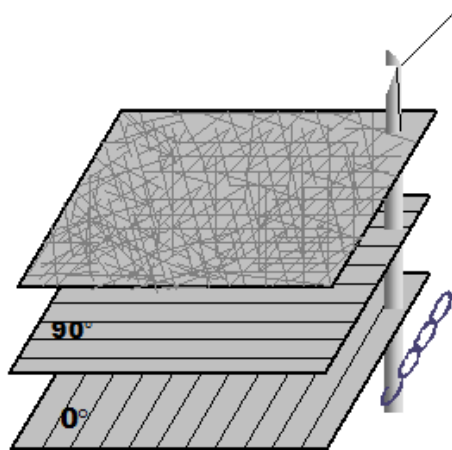

06/2016

All information is given, based upon our best knowledge, but without liability to us. Data has been obtained by laboratory experiments made by our supplier. Since the condition under which the product is consumed is outside of our control, the product should be tested before use.