


IL PE 450/150/450, 127 CM

REFERENCE : IL PE 450/150/450, 127 cm

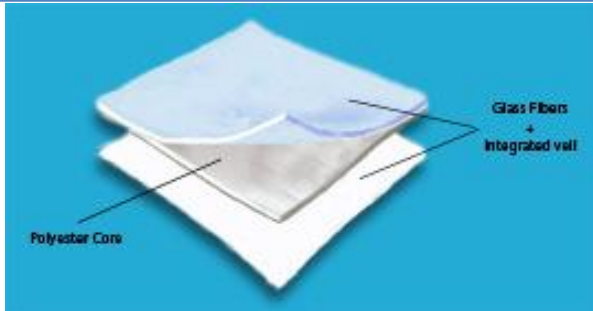

Fibre reinforcement for closed mould processes (RTM, light RTM, Press, etc.)

LAYERS	DESCRIPTION	WEIGHT
LAYER 1	Fibreglass	450 gr/m ²
CORE	Polyester	150 gr/m ²
LAYER 2	Fibreglass	450 gr/ m ²
FIXATION	Synthetic with veil integrated	50 gr/ m ²
TOTAL WEIGHT		1100 gr/m ² (+/- 10 %)

PACKAGING

Cardboard Tube	55 cm. 3 in. (inside diameter)	65 mtrs.	1270 mm.	91 kg.
----------------	-----------------------------------	----------	----------	--------

PACKING

4 rolls / Pallet
36 Pallets/40'HC Container

STORAGE

2 layers maximum stacking
Product must be stored only in dry location away from moisture of any kind

06/2016

All information is given, based upon our best knowledge, but without liability to us. Data has been obtained by laboratory experiments made by our supplier. Since the condition under which the product is consumed is outside of our control, the product should be tested before use.